

HORSE WALKER

Type LBE - Basic



Horse Walker LBE – the basic model with high-quality

This basic model is suitable for smaller private stables. You can train your horses while doing something else without worrying. The horse walker manages the daily exercise of your horses easily but purposefully.



Horses need exercise!

In the wild horses move between 30 and 50 km on a daily basis while they are grazing. In order to keep your horses healthy and strong they do need to be able to move around enough. A lack of exercise influences the horses' mental state negatively and often results in problems of their locomotor system. The exercise with a rider is often not enough therefore we need to consider other options in order to keep our four-legged friends healthy. Our horse walkers do exactly that they keep horses happy by offering exercise which serves the purpose of increasing and maintaining health and strength. The Columbus horse walkers are especially renowned in professional settings for their effective performance, high-quality materials and safety measures. Muscle strength, vitality and stamina are trained with the right intensity.



- Standard walk control
- Elektronik break system
- Safety Slip System
- Silent during operation
- Power consumption 0,4 kW/h
- Industrial drive
- Various safety measures
- Low on maintenance
- Equipped with strong support bearing
- All steel parts are galvanized according to German standards
- CE- certified

-We also offer suitable fences, roofs and track surfaces-

HORSE WALKER


Type LBE - Basic



Product Details Control Panel WBC 1.1 and LBE Horse Walker

Control panel WCB 1.1

Speed	adjustable with speedometer
Max. Speed	16 km/h
Direction	automatic left right
Time intervals programmable	0-60min.
IP certification	IP 65
Connection voltage	230 Volt 50 Hz
Power connection	1,5 m cable and plug
Connection of system	pin plug IP65 connection
Emergency stop	yellow/red switch
Control panel material	galvanized steel with powder coating
Dimensions	25x20x20cm
Optional	mounting brackets , on/of switch for low current system

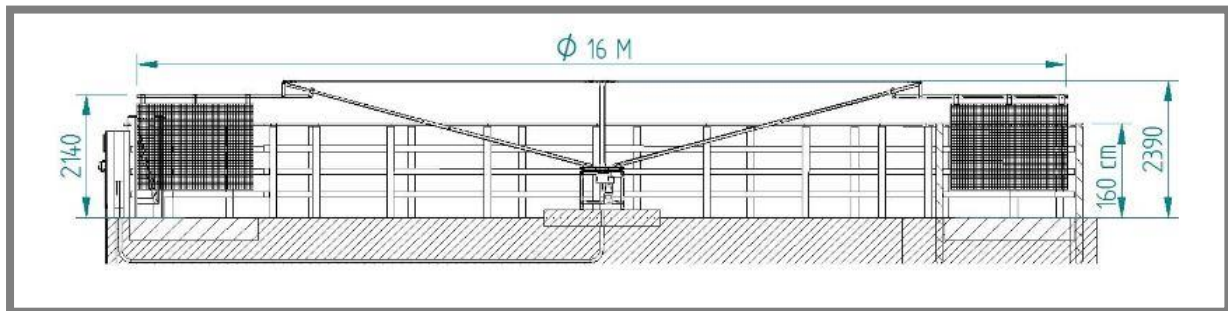

	Art.Nr.	16M 3P	16M 4P	16M 5P	16M 6P
Diameters of walker (meters)		16	16	16	16
Amount of horses		3	4	5	6
Safety Slip Drive		x	x	x	x
Coupling NoN Slip Drive		x	x	x	x
Direct drive		•	•	•	•
Electronic Break System		•	•	•	•
Motor cable including plug (meters)		12	12	12	12
Pusher with strap connection		•	•	•	•
Pusher with safety rotation system		x	x	x	x
Galvanized according to NEN-EN-ISO 1461-99		•	•	•	•
Connection voltage 230V 50Hz		•	•	•	•
Connection voltage 240V 60Hz		○	○	○	○
Energy consumption in kW		0,4	0,4	0,4	0,4
Central post		•	•	•	•
Central drive unit closed		x	x	x	x
Galvanized steel cable		•	•	•	•
CE certified		•	•	•	•
Installation position		v	v	v	v
Mesh pusher gate 2x 1,5 meter	MF 215	•	•	•	•
Light weight pusher gate with 10 bars 2x 1,6 m	HE SF 216	○	○	○	○
Preparation for weak current electrification	ESP	○	○	○	○
Weak current device 10kV cables and earth rod	SDCE 10	○	○	○	○
Walk-control 1.1	WCB 1.1	•	•	•	•
Walk trot control 2.1	WCB 2.1	○	○	○	○
Extra diameters	XD	○	○	○	○
Assembly by CPHE	ASM	○	○	○	○

Optional ○ , Standard • , Not possible x , on ground v , under ceiling ▲